


\* = OPTIONAL

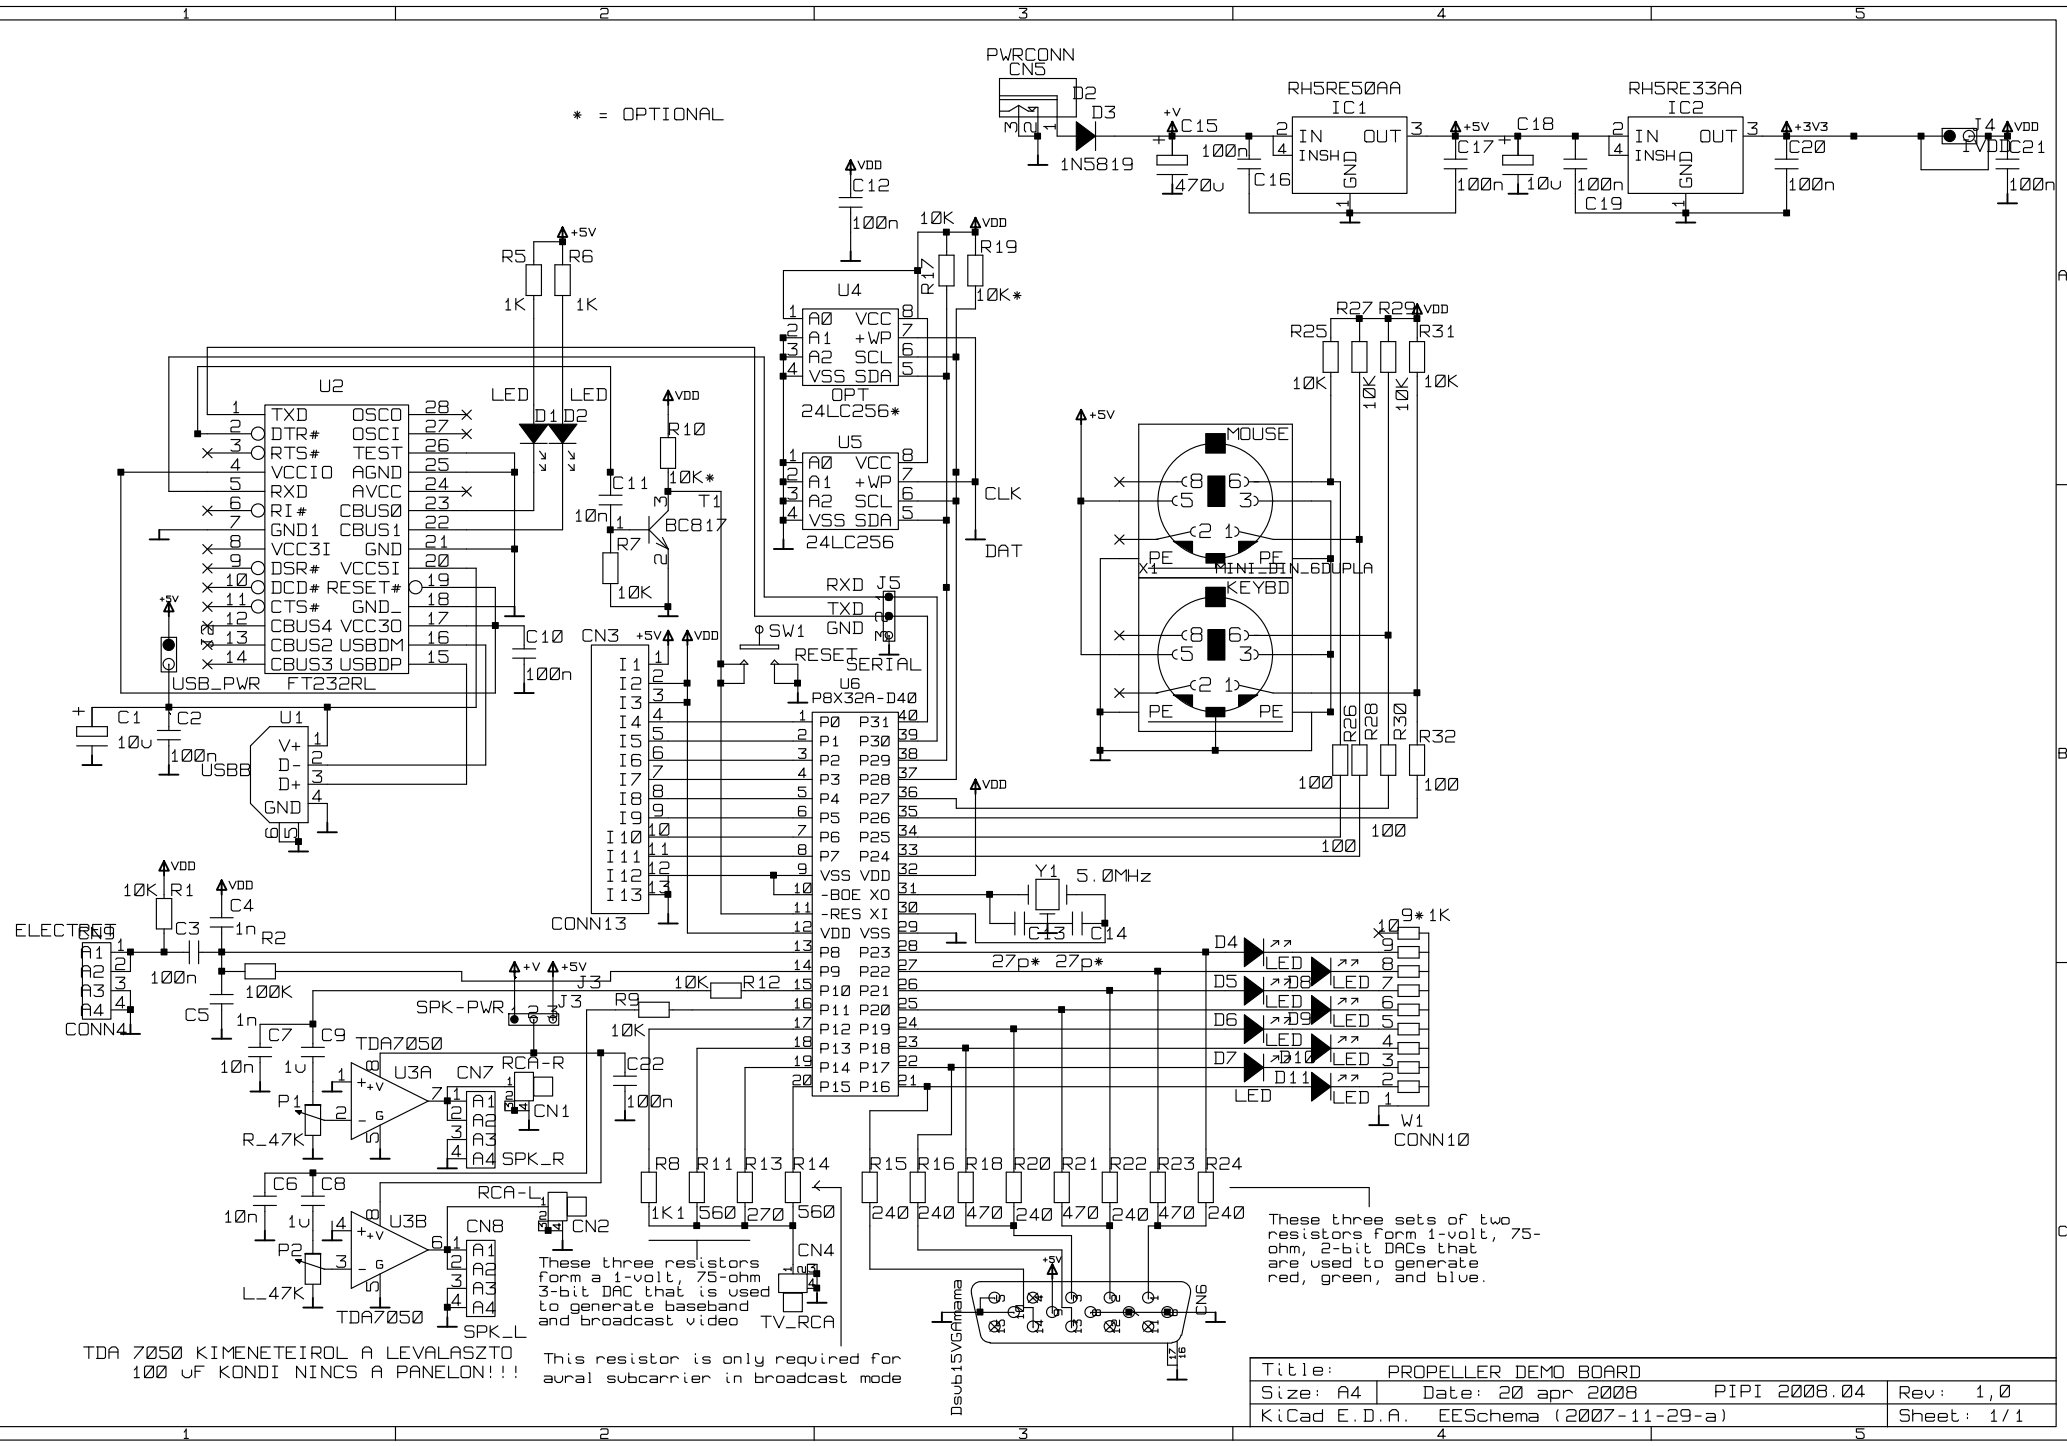

TDA 7050 KIMENETEIROL A LEVALASZTO 100 UF KONDI NINCS A PANELON!!!  
 This resistor is only required for aural subcarrier in broadcast mode

These three sets of two resistors form 1-volt, 75-ohm, 2-bit DACs that are used to generate red, green, and blue.

Title:	PROPELLER DEMO BOARD		
Size:	A4	Date:	20 apr 2008
KiCad:	E.D.A.	EESchema:	(2007-11-29-a)
Rev:	1,0	Sheet:	1/1